

SG CONNECT

**TWÓJ MOST DO ENERGETYCZNEJ
SAMOWYSTARCZALNOŚCI**



WWW.SGCONNECT.EU



Download on the
App Store

GET IT ON
Google Play

TREŚĆ INDEX

04

SG Connect

08

Synaptic, Nexus,
SG Connect App

10

NGEN Star

12

Smart Box

14

Falowniki

20

Baterie

24

G-MAX Bateria

26

Zestaw zasilający

28

Stacja ładowania AC

30

justCHARGE




Twój most do energetycznej samowystarczalności

WPROWADZENIE SG Connect



Smart Grid Connect to niezależna cyfrowa platforma energetyczna, która tworzy wirtualne środowisko łączące wytwórców i odbiorców energii elektrycznej.

Wszyscy użytkownicy platformy korzystają z zalet inteligentnej kontroli przepływu energii w czasie rzeczywistym. Dynamiczna produkcja energii elektrycznej i możliwość wykorzystania pojemności systemów akumulatorowych, zarówno na poziomie gospodarstw domowych, jak i przemysłu, umożliwiają społeczności **Smart Grid Connect** niezawodne i optymalne zarządzanie zasobami energetycznymi, przy jednoczesnym promowaniu oszczędności energii.

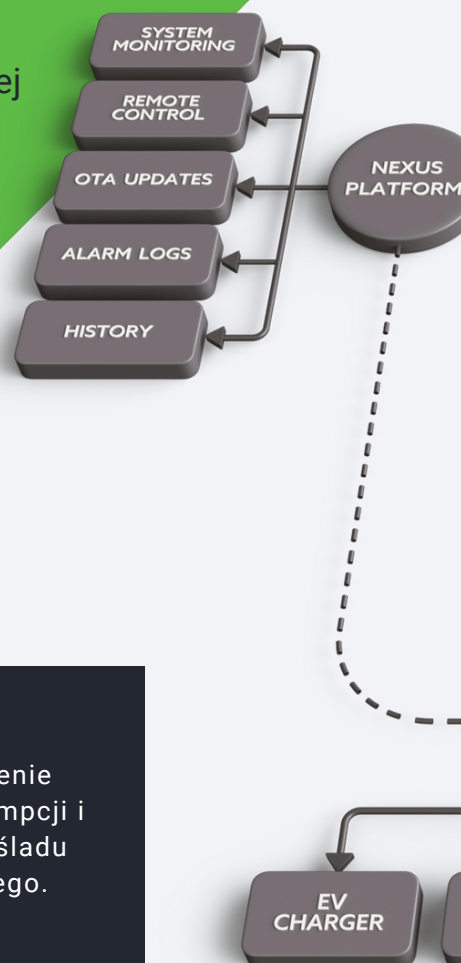**1**

Przyjazne dla użytkownika oprogramowanie ze scentralizowanym zarządzaniem poprzez aplikację mobilną.

2

Redukcja kosztów energii dzięki wykorzystaniu dynamicznych cen rynkowych i inteligentne zarządzanie własnymi zasobami.

3


Zwiększenie autokonsumpcji i redukcja śladu węglowego.

4

Najwyższy poziom cyberbezpieczeństwa, z wykorzystaniem serwerów zlokalizowanych w UE i naszego własnego oprogramowania zabezpieczającego.

5

Najwyższy poziom niezawodności i komfortu z możliwością zasilania awaryjnego.

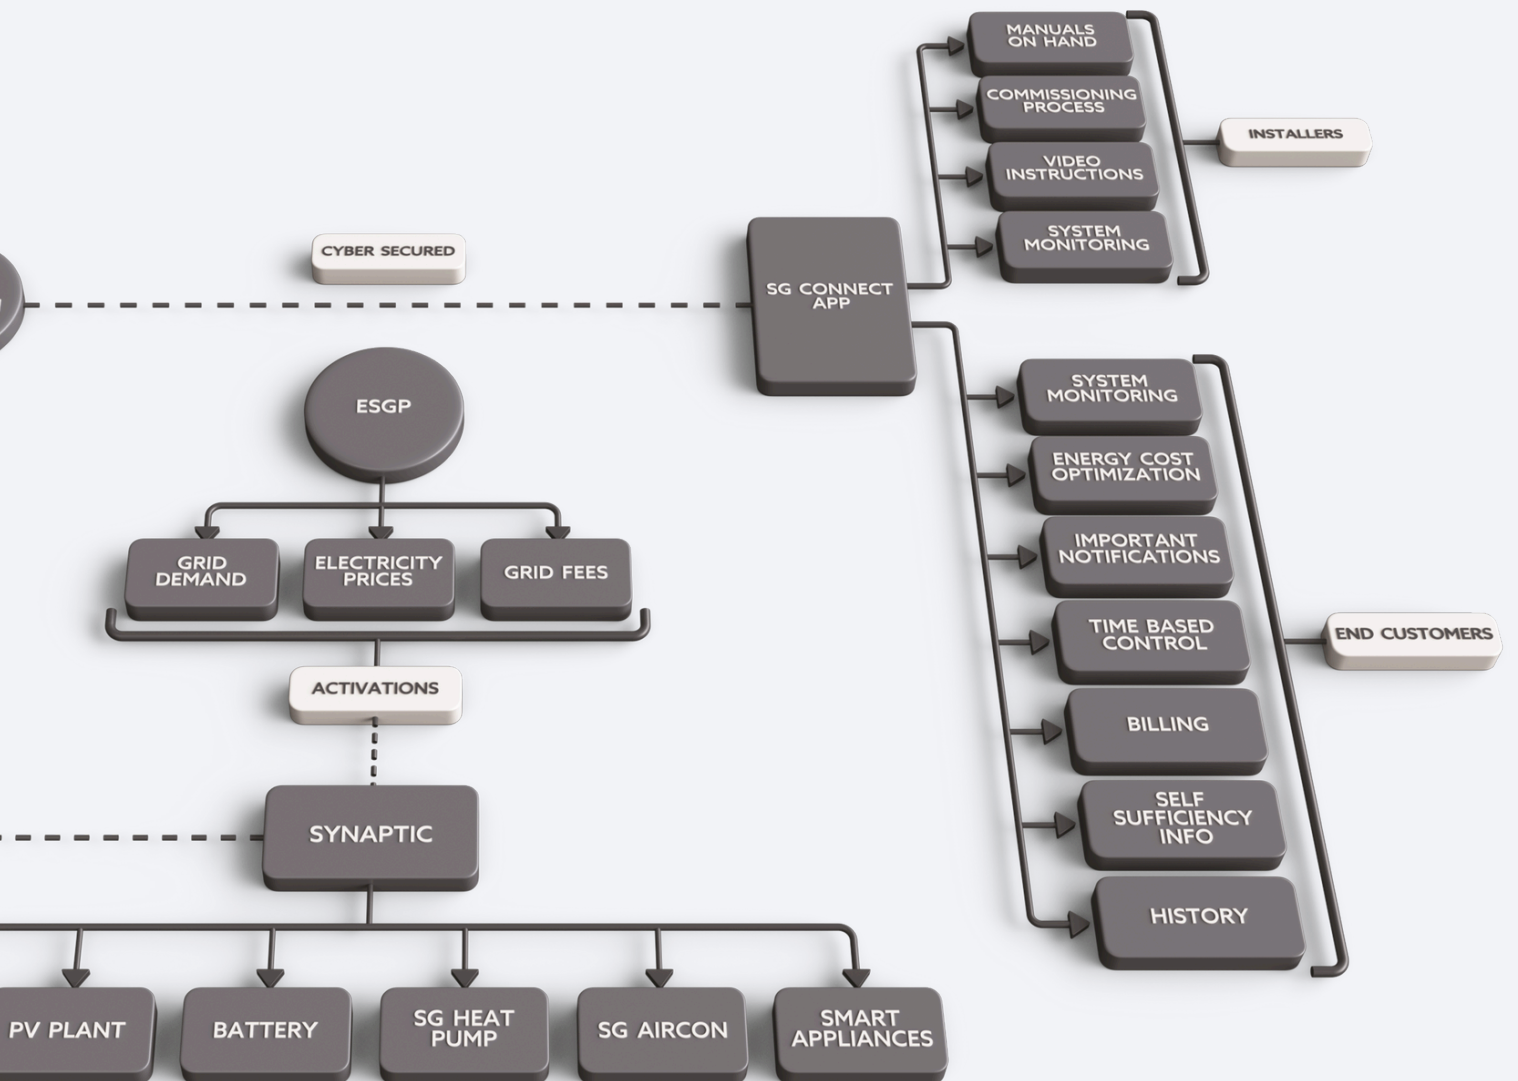

SG CONNECT

Korzyści



DYNAMICZNE CENY

Jeśli Państwa dostawca energii oferuje dynamiczne taryfy energii elektrycznej, SG-Connect umożliwia ładowanie akumulatorów i aktywację urządzeń podłączonych do interfejsu SG-Ready w korzystnych przedziałach czasowych. Łącząc to z funkcją zmiany obciążenia, można skutecznie wykorzystać wahania cen na europejskich rynkach spot i day-ahead. **(Funkcja zależna od kraju)**

Państwa korzyść: Niskie ceny i darmowa energia elektryczna w określonych przedziałach czasowych.



DYNAMICZNE ZASILANIE

Platforma SG Connect dostosowuje moc zasilania systemu fotowoltaicznego w oparciu o obciążenie sieci i pozwala na zasilanie przekraczające limit eksportu określony przez operatora sieci. Dzięki dynamicznemu zasilaniu, energia słoneczna może być częściowo lub całkowicie wprowadzana do sieci podczas niskiego obciążenia sieci. **(Funkcja zależna od kraju)**


Państwa korzyść: Znaczne skrócenie czasu amortyzacji systemu.



OPTIMALIZACJA AUTOKONSUMPCJI

Najbardziej znaczące oszczędności energii wynikają ze zwiększenia samodzielnego zużycia energii wygenerowanej przez instalację. Dzięki magazynowaniu energii, nadwyżka z systemu fotowoltaicznego może być przechowywana i wykorzystywana w czasie, gdy światła słoneczne jest mało lub nie ma go wcale.

Państwa korzyść: Zmniejszenie kosztów energii i opłat sieciowych. czasu amortyzacji systemu.



WYRÓWNYWANIE SZCZYTOWYCH OBCIĄŻEŃ

Optimalizacja zużycia energii z sieci elektrycznej poprzez ograniczenie do poziomu uprzednio zdefiniowanego progu. Jeśli rzeczywiste zużycie przekracza określony limit, różnica jest kompensowana przez aktywację akumulatorów.


Państwa korzyść: Skuteczne obniżenie opłat sieciowych.



ZASILANIE AWARYJNE

IW przypadku zaniku zasilania system SG-Connect przełącza się na zasilanie awaryjne w ciągu 20 ms.

Państwa korzyść: Zapewnienie ciągłej funkcjonalności urządzeń gospodarstwa domowego.



USŁUGI SIECIOWE

Jako właściciel systemu SG Connect można aktywnie uczestniczyć w bilansowaniu sieci krajowej. System przesyłu energii elektrycznej ma kluczowe znaczenie dla europejskiej niepodległości, dobrobytu gospodarczego i bezpieczeństwa publicznego. **(Funkcja zależna od kraju)**

Państwa korzyść: Stabilna sieć elektryczna przekłada się na zmniejszenie kosztów utrzymania i zwiększa konkurencyjność lokalnej gospodarki.



PRZESUNIĘCIE OBCIĄŻENIA

Zapotrzebowanie na energię przenosi się z godzin szczytu na godziny pozaszczytowe. Wbudowana platforma ESGP umożliwia wykorzystanie przedziałów czasowych z niskimi cenami energii elektrycznej.

Państwa korzyść: Obniżenie kosztów energii.



REAKCJA NA ZAPOTRZEBOWANIE

SG-Connect umożliwia elastyczne reagowanie na wymagania dotyczące odciążenia sieci elektrycznej. W przypadku przeciążenia spowodowanego wprowadzeniem energii przez niestabilnych producentów, żądanie jest aktywowane przez operatora systemu przesyłowego przekazywane do jednostki Synaptic. To urządzenie aktywuje ładowanie baterii i dodatkowo podłączone urządzenia SG-Ready. **(Funkcja zależna od kraju)**

Państwa korzyść: W czasie aktywacji obowiązują tylko obniżone opłaty sieciowe.



REDUKCJA ŚLADU WĘGLOWEGO

Stabilizacja sieci elektroenergetycznej oraz zarządzanie wahaniami produkcji i zużycia energii prowadzi do zmniejszenia liczby urządzeń rezerwowych opartych na konwencjonalnych źródłach energii, takich jak olej napędowy lub gaz ziemny

Korzyść dla nas wszystkich: Zwiększona wydajność systemów fotowoltaicznych oznacza redukcję emisji CO₂ i innych gazów cieplarnianych.

WPROWADZENIE

Synaptic^{CE}

Synaptic to zaawansowane rozwiązanie sprzętowe do optymalizacji i kontroli systemów energetycznych w czasie rzeczywistym, połączone z platformą SG Connect. Umożliwia gromadzenie i analizę danych z różnych źródeł, wykorzystując sztuczną inteligencję i uczenie maszynowe do dokładnego prognozowania popytu i podaży, a także efektywnego zarządzania energią.

Synaptic poprawia stabilność sieci, zmniejsza koszty operacyjne i zwiększa niezawodność dostaw, co czyni go kluczowym elementem dla operatorów systemów energetycznych i dostawców energii odnawialnej.




**OPRACOWANY PRZEZ
NGEN KOD MASZINY**



**ŁĄCZNOŚĆ
PLUG&PLAY**




INTELIGENTNY LICZNIK



**LOKALNE ZARZĄDZANIE
ENERGIĄ**



**SAMOWYSTARCZALNOŚĆ I
SYSTEMY
MAGAZYNOWANIA ENERGII**



**ZASTOSOWANIA
PRZEMYSŁOWE**



**DOSTĘP DO
GIEŁDY ENERGII**



**APLIKACJA SMART
GRID CONNECT**



SMART GRID


Connect App




Follow your electricity production



Control your energy sources




Participate in virtual groups



Recieve personalized notifications

ADVANTAGES

Nexus

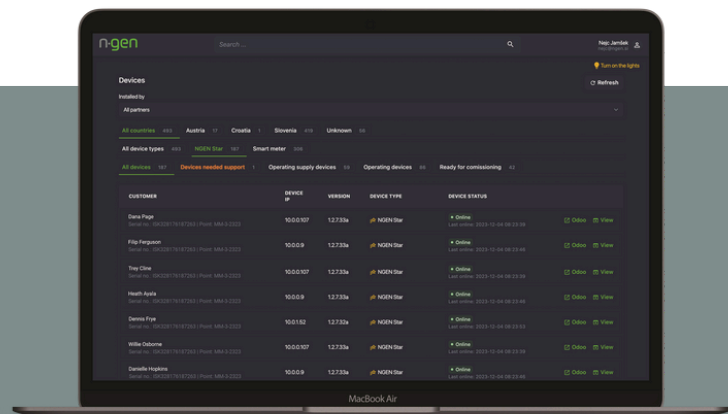

PLATFORM FOR SYSTEM MONITORING



REMOTE CONTROL



PERFORMANCE TRACKING



TROUBLE-SHOOTING



REAL TIME DATA TRACKING



COMMISSIONING WIZARD IN 5 STEPS

NEW ERA OF SELF-SUFFICIENCY

NGEN Star

NGEN Star is a hybrid system that includes a solar power plant and an electrical energy storage system with an integrated hybrid inverter and a electrical smart meter.



**Simple
Installation**



**High
Efficiency**



**Expandable
System**



**90% Discharge
Range**



**Heatpump
Integration**




**EV Charger
Ready**



**Backup power
4,5-30 kW**



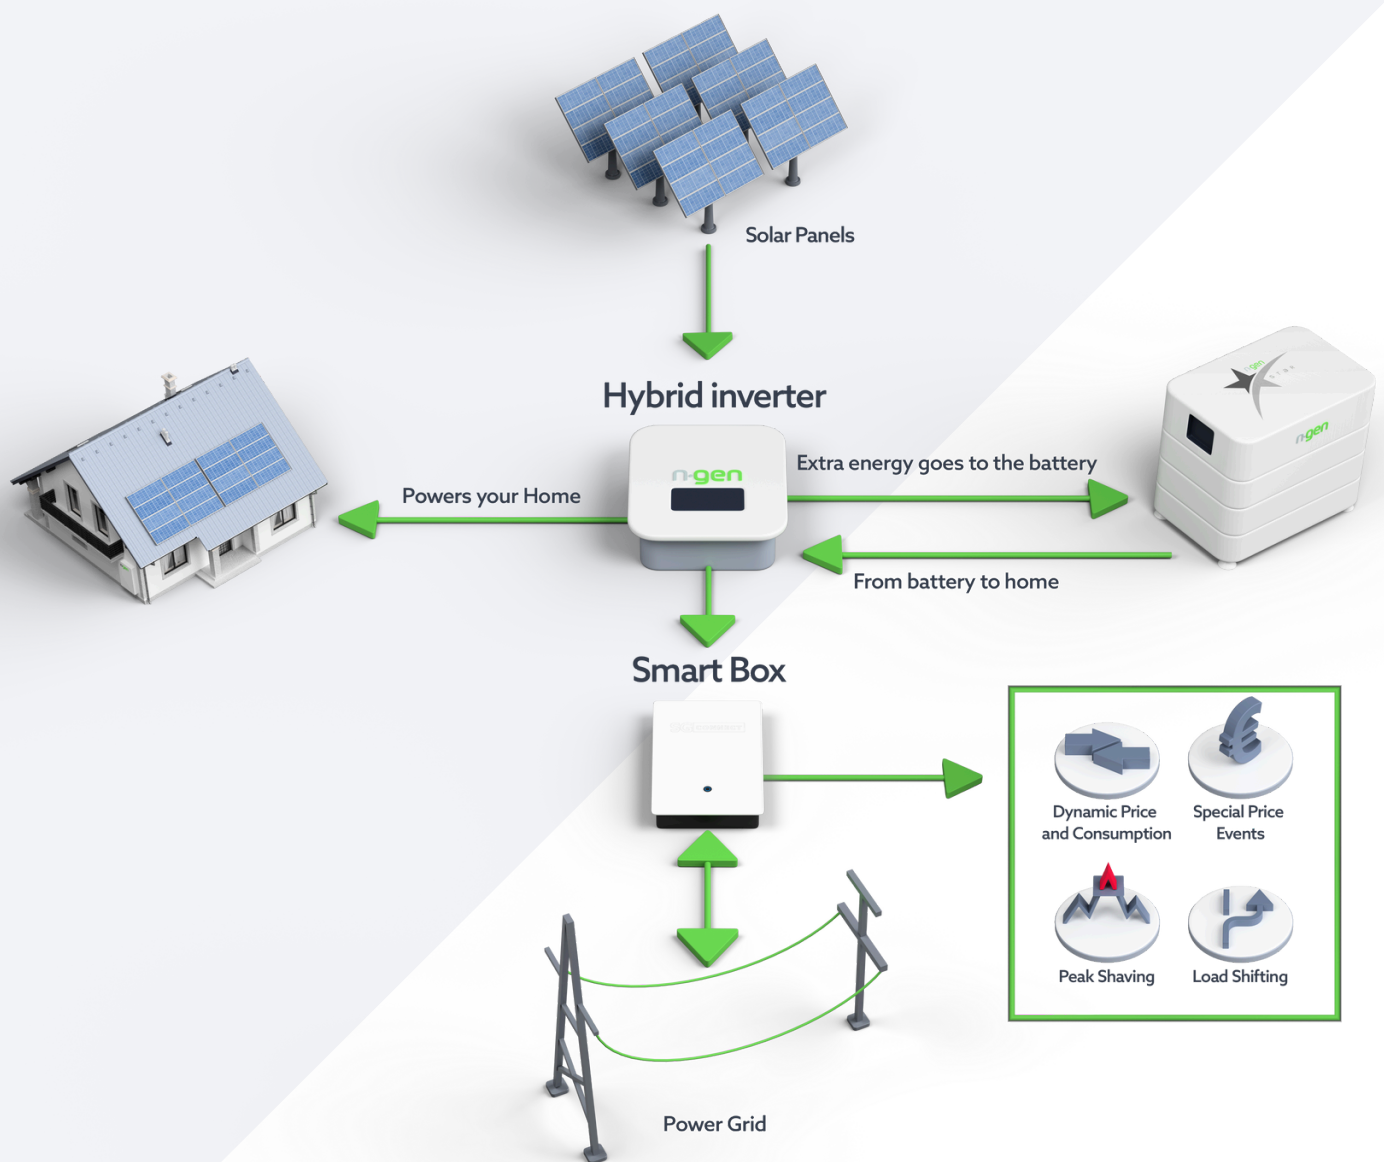

INTRODUCTION

Smart Box



**PREINSTALLED FOR
PLUG&PLAY
INTEGRATION**



**EASY INSTALLATION
VIA CONNECTION
POINTS**



**COMPREHENSIVE
SOLUTION**



**IN ACCORDANCE
WITH INSTALLATION
REGULATIONS**



**COMPATIBLE
WITH SMART GRID
CONNECT**



**SMART METER
INCLUDED**



**2 SECONDS
LIVE DATA**



**SYNAPTIC
INCLUDED**



READY TO CONNECT WITH:



**HYBRID INVERTER WITH
BACK-UP POWER SUPPLY**



**NON BACK-UP
APPLICATIONS**



HEAT PUMP



EV CHARGER



WATER HEATER



**MODULE OPTIMIZERS
(Only Box Type A)**



**OTHER
APPLICATIONS WITH
SG READY CONTACT**

Smart box represents a revolution in home electrical networks. It is designed to combine all necessary components in one package, simplifying the installation. Moreover, it optimizes energy consumption and reduces costs, while the built-in safety switch and protective components ensure high safety level.



SPECIFICATIONS

Model	A163	A363	B163	B363	C300
Rated voltage (Un):	1 x 230 VAC 50 Hz	3 x 230 VAC 50 Hz	1 x 230 VAC 50 Hz	3 x 230 VAC 50 Hz	3 x 230 / 400VAC 50 Hz
Rated current (In):	63 A	63 A	63 A	63 A	63 A
Protection (IP):	54	54	54	54	54
Dimensions (H x W x D) (mm):	640x420x130	640x420x130	640x420x130	640x420x130	640x420x130
TIGO:	YES	YES	NO	NO	NO
Item No.:	504644 OR 4	504648 OR 8	504645 OR 5	504649 OR 9	504650 OR 10
Standard:	SIST EN 61439-1 & SIST EN 61439-2				

Smart Box Lite

For upgrading FOX ESS or its OEM Hybrid inverters with SG Connect System Solution.

Item Number: 505538



Model	Rated voltage (Un)	Rated current (In)	Protection (IP)	Dimensions HxWxD (mm)
Smart Box Lite	3 x 230 VAC 50Hz	63 A	54	200 x 300 x 140

Inverters


INVERTER

Star H1

STAR-H1-3.7-E/6.0-E

Item Number: 505104, 504631

Rated AC Power [W]	3680	6000
Max. AC Current	16,7	27,3
Max. EPS Power [W]	3680	6000
Max. EPS Current [A]	16,7	27,3
Max. Input Power [W]	5500	9000
No. of Independent MPP Trackers	2	
No. of Strings per MPP Tracker	1 / 1	
Max. Storage Capacity [Wh]	41930	
Dimensions (WxHxD) [mm]	434 x 418 x 185	
Warranty	Standard 10 / Advanced 12 *	

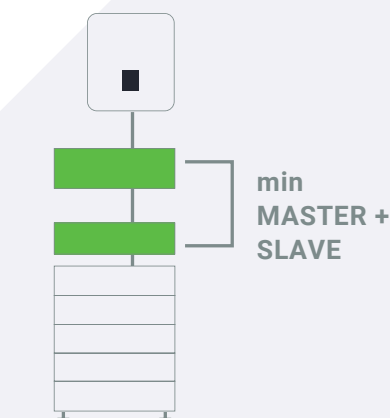


Bundle	Inverter type	Power [kW]	Smart Box	Item Number
H1-3.7-A163	H1	3,7	A163	505179
H1-3.7-B163	H1	3,7	B163	505180
H1-6-A163	H1	6	A163	504657
H1-6-B163	H1	6	B163	504658

* Standard Warranty: 10 years / Advanced Warranty: 12 years when the System is connected to the SG Connect System Solution.

INVERTER

Star H3**STAR-H3-12.0-E****Item Number:** 504632


Rated AC Power [W]	12000
Max. AC Current	19,2
Max. EPS Power [W]	12000
Max. EPS Current [A]	22,7
Max. Input Power [W]	15000
No. of Independent MPP Trackers	2
No. of Strings per MPP Tracker	2 / 1
Max. Storage Capacity [Wh]	41930
Dimensions (WxHxD) [mm]	449 x 519 x 198
Warranty	Standard 10 / Advanced 12 *

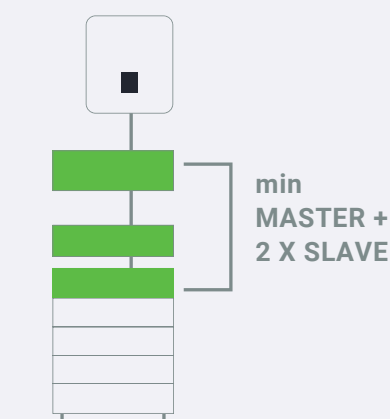

Bundle	Inverter type	Power [kW]	Smart Box	Item Number
H3-12-A363	H3	12	A363	504661
H3-12-B363	H3	12	B363	504662

* Standard Warranty: 10 years / Advanced Warranty: 12 years when the System is connected to the SG Connect System Solution.

INVERTER

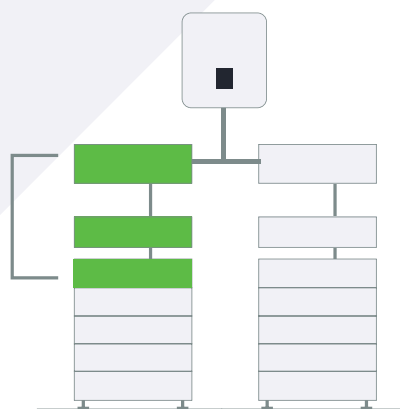Star H3 Pro

min MASTER +
2 X SLAVE

**STAR-H3-15.0/22.0/29.9/30.0-PRO**

Item Number: 504633, 504634, 505116, 504635

Rated AC Power [W]	15000	22000	29900	30000
Max. AC Current	25	36,7	45,4	50
Max. EPS Power [W]	15000	22000	30000	30000
Max. EPS Current [A]	22,7	33,3	45,5	45,5
Max. Input Power [W]	22500	33000	45000	45000
No. of Independent MPP Trackers	3			
No. of Strings per MPP Tracker	2 / 2 / 2			
Max. Storage Capacity [Wh]	83880			
Dimensions (WxHxD) [mm]	600 x 560 x 225			
Warranty	Standard 10 / Advanced 12 *			

Standard Warranty: 10 years / Advanced Warranty: 12 years when the System is connected to the SG Connect System Solution.

Star H3 Pro Bundles

STAR-H3-15.0-PRO

Bundle	Inverter type	Power [kW]	Smart Box	Item Number
H3P-15-A363	H3 PRO	15	A363	504665
H3P-15-B363	H3 PRO	15	B363	504666

STAR-H3-22.0-PRO

Bundle	Inverter type	Power [kW]	Smart Box	Item Number
H3P-22-A363	H3 PRO	22	A363	504669
H3P-22-B363	H3 PRO	22	B363	504670

STAR-H3-29.9-PRO

Bundle	Inverter type	Power [kW]	Smart Box	Item Number
H3P-29.9-A363	H3 PRO	29.9	A363	504673
H3P-29.9-B363	H3 PRO	29.9	B363	504674
H3P-29.9-C300	H3 PRO	29.9	C300	504675

STAR-H3-30.0-PRO

Bundle	Inverter type	Power [kW]	Smart Box	Item Number
H3P-30-A363	H3 PRO	30	A363	504673
H3P-30-B363	H3 PRO	30	B363	504674
H3P-30-C300	H3 PRO	30	C300	504675

Star Parallel Box

for parallel connection of multiple Star-H3-Pro inverter.

Item Number: 505106

Model	Max number of Inverters in Parallel	Item Number
Star Parallel Box	10 in On-Grid Operation 4 in Off-Grid Operation	505536



MICRO INVERTER

Star M1**M1-1000, 1200****Item Number:** 505488, 505535

Model	M1 - 1000 / M1 - 1200
Applicable module power [Wp]	355 - 670
Max. Input Voltage [V]	60
Start-up Voltage [V]	24
No. of Independent MPP-Tracker	2
No. Of Strings per MPP-Tracker	2 / 1
Operating Temperature [°C]	-25 to +60
Dimensions (WxHxD) [mm]	270 x 182 x 34.5

Storage units

STAR S2-S9

Battery type	4300	4800
Model	Nominal capacity [Wh]	
STAR S2*	8300	9320
STAR S3	12450	13980
STAR S4	16600	18640
STAR S5	20750	23300
STAR S6	24900	27960
STAR S7	29050	32620
STAR S8	X	37280
STAR S9	X	41940


Cycle Life	>6000
Recommend Discharge Current [A]	25
Max. Charge/Discharge Current [A]	50
Depth of discharge [%]	90
Operating Temperature [°C]*	Charging from 0 to +55 Discharging from -10 to +55
Dimensions (WxHxD) [mm]	570 x (366 - 1352) x 380
Warranty	Standard 10 / Advanced 12 *

* Charge derating will occur between 0°C and +15°C.

** Standard Warranty: 10 years or 6000 Cycles.

** Advanced Warranty: 12 years or 6000 Cycles when the Battery is connected to the Hybrid Inverter and the SG Connect System Solution.



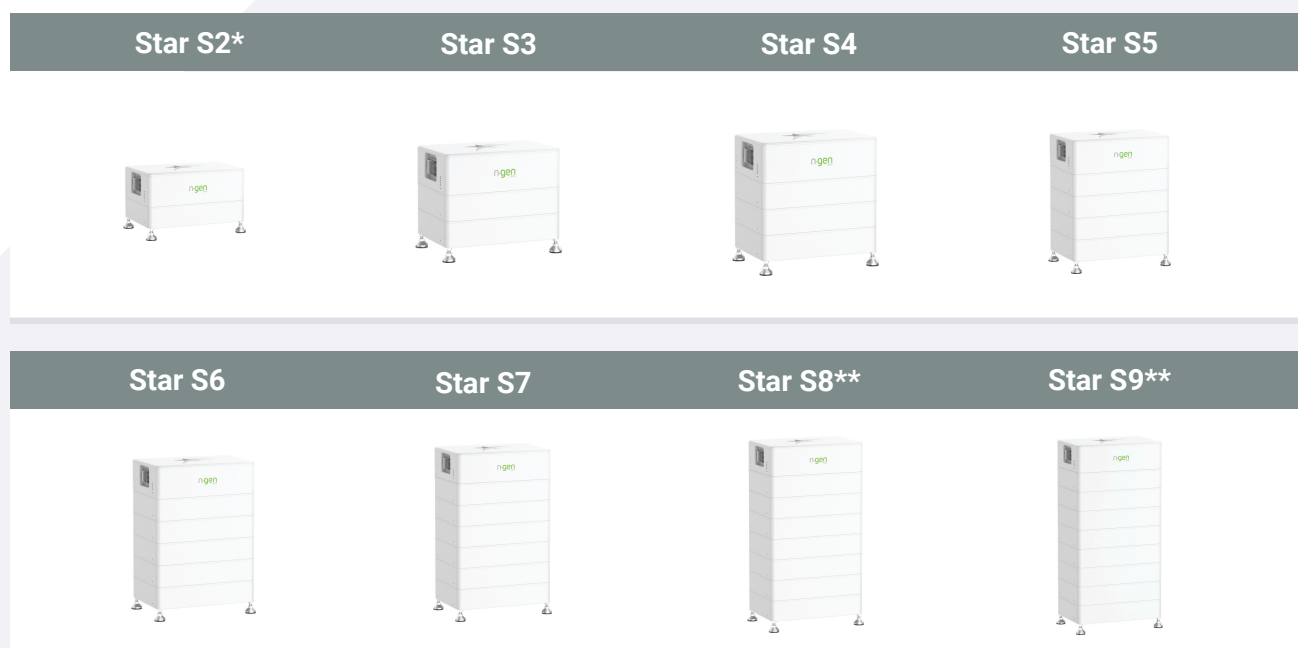

* S2 Compatible with 1-phase inverter STAR-H1.

** S8 and S9 available only for 4800 system.

Model	Batery type	Capacity [Wh]	Item Number
Master 4300	ESM4300	4150	504627
Slave 4300	ECS4300	4150	504628
Master 4800	ESM4800	4660	504629
Slave 4800	ECS4800	4660	504630

Storage units

STAR-EP5

Item Number: 505106

Nominal Energy [Wh]	5180
Nominal Voltage [V]	192
Cycle Life	≥4000
Recommend Discharge Current [A]	13,5
Max. Charge/Discharge Current [A]	27
Depth of Discharge [%]	90
Operating Temperature [°C]	Charging from 0 to +55 Discharging from -10 to +55
Dimensions (WxHxD) [mm]	380 x 625 x 147
Warranty	Standard 5 / Advanced 10 *



* Standard Warranty: 5 years or 4500 Cycles / Advanced Warranty: 10 years or 4500 Cycles when the Battery is connected to the Hybrid Inverter and the SG Connect System Solution.

Model	Battery Type	Capacity [Wh]	Item Number
STAR-EP5	EP5	5180	505106

STAR-EP11

Item Number: 505107

Nominal Energy [Wh]	10360
Nominal Voltage [V]	384
Cycle Life	≥4000
Recommend Discharge Current [A]	13,5
Max. Charge/Discharge Current [A]	27
Depth of Discharge [%]	90
Operating Temperature [°C]	Charging from 0 to +55 Discharging from -10 to +55
Dimensions (WxHxD) [mm]	710 x 625 x 147
Warranty	Standard 5 / Advanced 10 *



* Standard Warranty: 5 years or 4500 Cycles / Advanced Warranty: 10 years or 4500 Cycles when the Battery is connected to the Hybrid Inverter and the SG Connect System Solution.

Model	Battery Type	Capacity [Wh]	Item Number
STAR-EP11	EP11	10360	505107

HV Junction Box

for the parallel connection of up to 4 EP-Batteries.

Item Number: 505106

Model	Max. Batteries in parallel	Max. Current [A]	Item Number
HV Junction Box	4	50	505537




AC-Coupled G-MAX Battery

STAR-G-MAX

Item Number: 505503

The NGEN-STAR G-MAX follows an “All-In-One” design philosophy, integrating a battery with longevity, intelligent battery management system (BMS), powerful power conversion system (PCS), preventive safety system, smart distribution system, and efficient thermal management within a single enclosure. This concept ensures standardized manufacturing and simplifies installation.

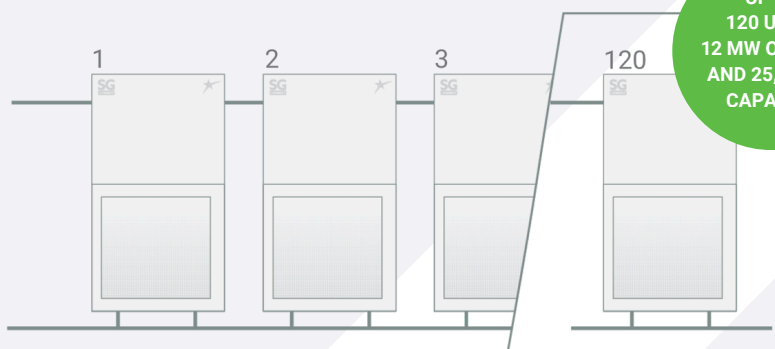



POWERFUL PERFORMANCE

100 kW AC-Output,
200kWh AC-Storage capacity and
a peak AC-Output of 110 kW.



EFFICIENT COOLING

Liquid cooling ensures optimal
temperature control and maximum
performance.



FLEXIBLE COMPATIBILITY

Integrates with solar, wind, and
other energy sources, either
standalone or hybrid.



SCALABLE SOLUTION

Cluster capability allows connection
of up to 120 units, achieving 12 MW
output and 25,8 MWh capacity.



USER-FRIENDLY MANAGEMENT

SG Connect app for intuitive control
and real-time optimization.



LOW MAINTENANCE

Designed for easy installation
and long-term reliability.

Battery System Capacity [kWh]	200 (AC) / 215 (DC)
Battery DC-Operating Voltage Range [V]	672 – 876
Discharge Energy throughput [MWh]	1.084 (AC) / 1.184 (DC)
Cycle life	6570 full cycles @70% SOE
Max. AC-Output Power [kW]	110
Depth of Discharge [%]	100
Cooling-Type	Liquid cooling
Battery-Type	LiFePO4 (lithium iron phosphate)
Operating Temperature [°C]	-25 to +55
Dimensions (WxHxD) [mm]	1040 x 2200 x 1500
Warranty	Standard 10 years / Extended 15 years *

Model	Capacity [kWh] (DC/AC)	Item Number
STAR-G-MAX	215/200	505503

* The G-Max 10-year and 15-year warranty is valid only if the system remains connected to SG Connect and an active Maintenance Agreement is maintained with SG Connect's authorized partners.

INTRODUCTION

Supply Kit

SG Connect has developed a system for measuring electrical energy flows which enables our customers to integrate into the SG Connect platform, transforming them into active users. In this way, they can connect to virtual groups for transferring excess energy produced by PV system and receive electricity based on a dynamic tariff.

MID **CE**
APPROVED



**24V DC SUPPLY
VOLTAGE**

**P1 PORT FOR SUPPLY
METER READINGS**

**LED LIGHT PORT FOR SYSTEM
OPERATION SIGNALISATION**

**WAN AND LAN PORTS FOR
RELIABLE WIRED ETHERNET
CONNECTION**

**2 MODBUS PORTS FOR
QUICK AND PRECISE
DATA TRANSFER**

**LARGE BATTERY INSIDE
FOR OFF-GRID OPERATIONS**

**LTE CARD FOR
UNINTERRUPTED
ETHERNET CONNECTION**

**3 RELAYS FOR SMART HOME
INTEGRATION AND ENERGY USE
OPTIMISATION:**

**INTEGRATED METER FOR
PRECISE SITE
MEASUREMENTS**

**RELAY 1
INCREASES
POWER
CONSUMPTION**

**RELAY 2
DECREASES
POWER
CONSUMPTION**

**RELAY 3
DECREASES
POWER
PRODUCTION**



**PRE-INSTALLED FOR PLUG & PLAY
INSTALLATION**



**CONNECTIVITY POINTS
EASY TO CONNECT**



**IN ACCORDANCE TO
INSTALLATION REGULATIONS**



**COMPATIBLE WITH
SG CONNECT**




**READY TO
CONNECT
WITH:**



**HEAT
PUMPS**



**EV
CHARGERS**



**ELECTRICAL
HEATER**



**APPLIANCES
WITH SG READY**

AC EV CHARGING STATION

NGEN



Solar Energy Management

Option to direct excess power from own production to the charging station.



Flexible Option

Charging cable type 1 or type 2, operation via application or 'Plug & Play'. wall or ground installation.



Secure and Safe

6mA DC residual current protection, Anti-welding protection, IP54 rated.



Energy Saving

Standby power consumption is less than 2 W, excellent energy efficiency.



Smart Management

Wireless communication (WiFi/bluetooth), OCPP communication protocol with the server, smart charging or scheduled via app.



MODEL	Rated current [A]	OCPP	Dynamic	Item Number
EV7	32	YES	YES	504636
EV11	16	YES	YES	504636
EV22	32	YES	YES	504636
Dynamic meter DT	63	/	/	504636
Dynamic meter CT	>63	/	/	504636

EV7	MODEL		NGEN-EV7
	Type	Charging Plug	
INPUT	Voltage	230 VAC, $\pm 20\%$	
	Max. Current	32 A	
	Frequency	50/60 Hz	
OUTPUT	Max. Current	32 A	
	Rated Power	7,3 kW	
USER INTERFACE AND CONTROL	Connection Type	2. Type 6m cable	
	Commissioning	Plug & Play / RFID card / App	
	Warranty	5 years	

EV11	MODEL		NGEN-EV11
	Type	Charging Plug	
INPUT	Voltage	400 VAC, $\pm 20\%$	
	Max. Current	16 A	
	Frequency	50/60 Hz	
OUTPUT	Max. Current	16 A	
	Rated Power	11 kW	
USER INTERFACE AND CONTROL	Connection Type	2. Type 6m cable	
	Commissioning	Plug & Play / RFID card / App	
	Warranty	5 years	

EV22	MODEL		NGEN-EV22
	Type	Charging Plug	
INPUT	Voltage	400 VAC, $\pm 20\%$	
	Max. Current	32 A	
	Frequency	50/60 Hz	
OUTPUT	Max. Current	32 A	
	Rated Power	22 kW	
USER INTERFACE AND CONTROL	Connection Type	2. Type 6m cable	
	Commissioning	Plug & Play / RFID card / App	
	Warranty	5 years	

CHARGE AND PAY ONLINE

justCHARGE

justCHARGE is a platform that enables comprehensive establishment and management of charging infrastructure and payment system.

- Automated management of all transactions, no hidden costs
- User-friendly experience, no RFID cards or apps
- AutoCharge - support for vehicle recognition
- Complete overview and control of energy consumption
- Ability to set charging rates based on charging station groups
- Connection to company vehicles and benefits management
- Comprehensive on-site and remote support
- 24/7 support
- Compatible with ALL charging stations with OCPP 1.6 JSON specification



NAVIGATION - easily find locations with available charging stations.

PAYMENTS - credit and debit cards, Google and Apple pay

CHARGING HISTORY - overview of past charging sessions


ELECTRIC VEHICLES - management of vehicles for automatic recognition

COMPREHENSIVE PLATFORM FOR ESTABLISHING AND MANAGING CHARGING INFRASTRUCTURE AND PAYMENT SYSTEM





SG **CONNECT**



WWW.SGCONNECT.EU